

OTTOSEAL S 110

OTTOSEAL S 110

Product properties:


- ➔ Silicone sealant based on a neutrally oxime-based crosslinking system
- ➔ Highly abrasion resistant free from streaks
- ➔ Tack-free surface
- ➔ Compatible with most paint systems (not paintable)



Fields of application

- ➔ Sealing of connection joints to windows and doors made of wood, metal and plastic
- ➔ Glass block glazing („Profilit“)
- ➔ Dilatation and connection joints between precast concrete panels



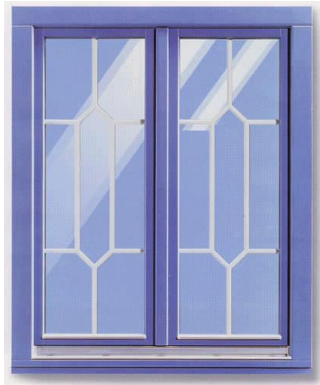

Fields of application:

- ➔ sealing between glass and framework (windows)
- ➔ Sealing of facades, parapet elements, and metal constructions
- ➔ Sealing applications in sanitary areas



OTTOSEAL S 110

Standards and test certificates

- ➔ Tested according to DIN 18545 part 2, fulfills requirements of group E, therefore highly abrasion resistant and protects from streaks of silicone particles
- ➔ Fulfills requirements of DIN 18540

